



QQQQ1-1




Former type Fan and filter  
From now on: FK 6623...




Fan and filter  
FK 6623.230




Exit filter  
FK 6623.300



Installing section  
FK 6623...



Power specific property curve  
FK 6623...

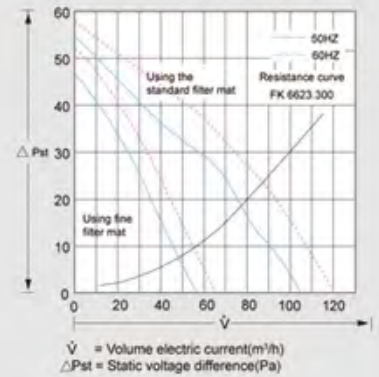

Fan and filter	Type FK	6623.230	6623.115	6623.024
Designed working voltage V/H		230/50/60	115/50/60	24(DC)
Air flow , free blowing		<b>105/120m<sup>3</sup>/h</b>		
Flux of air equip filter exported		1×FK 6623.300:71/82m <sup>3</sup> /h		
Include filtering pad of standard		2×FK 6623.300:85/98m <sup>3</sup> /h		
		1×FK 6623.300:78/90m <sup>3</sup> /h		
Axial fan		Self-start screened magnetic pole motor		Direct current motor
Rated current		0.12A 0.11A	0.24A 0.23A	0.15A
Power		19W/18W	19W/18W	3.5W
Noise level		46/49dB(A)		
Scope of temperature		-10°C~+55°C		
Exit filter	Type FK	<b>6623.300</b>		
It is possible to write to our company to consult if needing special voltage.				

Type FK6623.300

